




# LP-nouva Q

Glare-free and versatile  
luminaire for various mountings

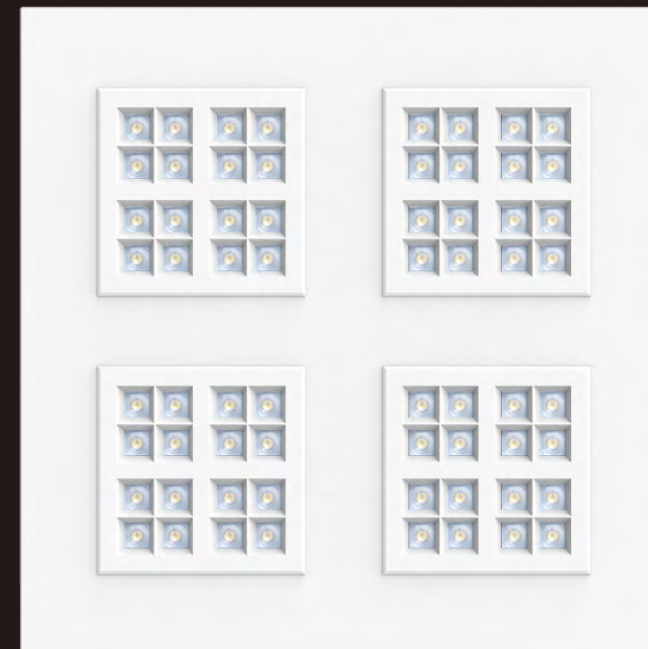

Liht-Project - AT  
6020 Innsbruck  
Maria Theresienstraße 7/1m  
[www.light-project.at](http://www.light-project.at)


Lihtproject-italia.it  
I-20123 Milano  
Via Cesare de Sesto 24  
[www.lightproject-italia.it](http://www.lightproject-italia.it)




## **Modernization of LP-nouva luminaire**

As the next generation of louvre luminaire, Louva Evo is the perfect combination of optic design and architectural aesthetics. Thanks to its distinct module with square lens, the luminaire will impress you with its elegant appearance.

## Two beam optics



Standard Beam(65°)




Wide Beam(95°)



### Standard beam optic for excellent glare control



Standard beam version provides highly efficient focus lights and excellent glare control for office workstations, compliant with EN12464-1:2011 ( $UGR < 16$ ,  $L65 < 1500 \text{cd/m}^2$ )

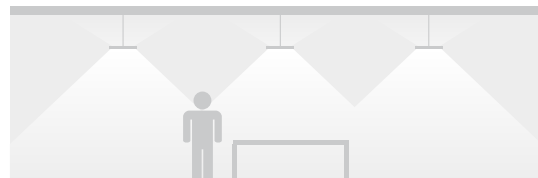


### Wide beam optic for high uniformity

Wide beam version offers maximum uniformity with standard-compliant glare control ( $UGR < 19$ ,  $L65 < 3000 \text{cd/m}^2$ ) for circulation area or working area with lower ceiling where there is demand on high light uniformity.


## Indirect/direct lights

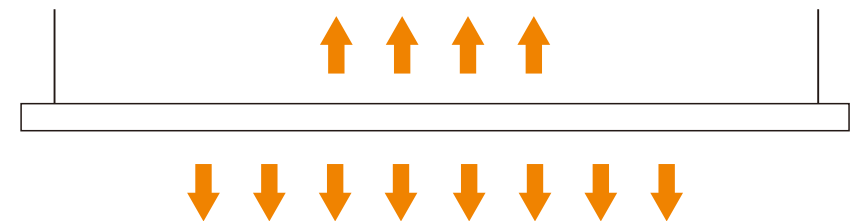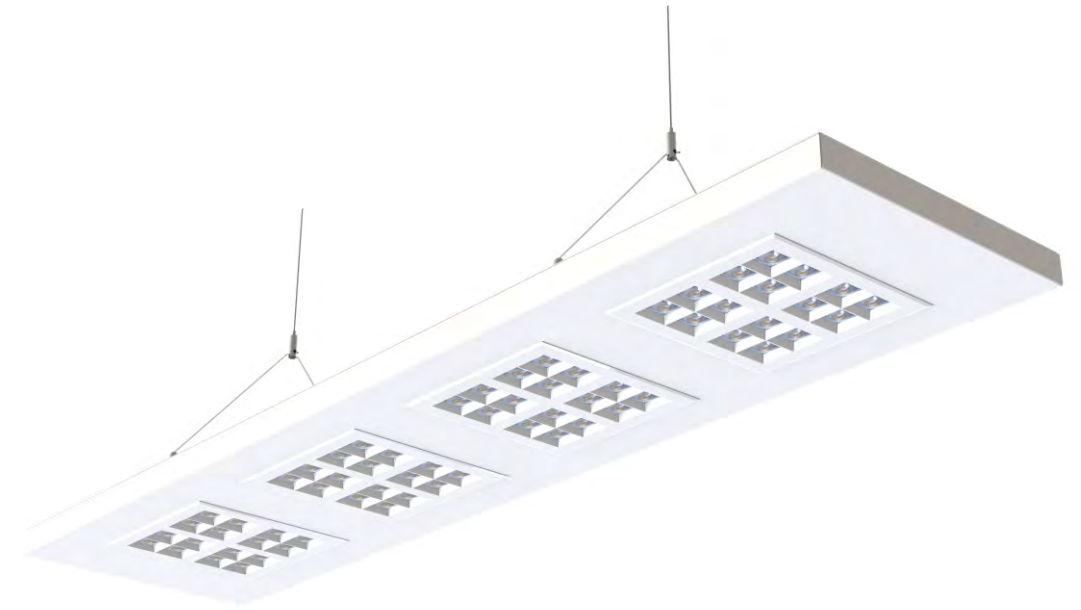

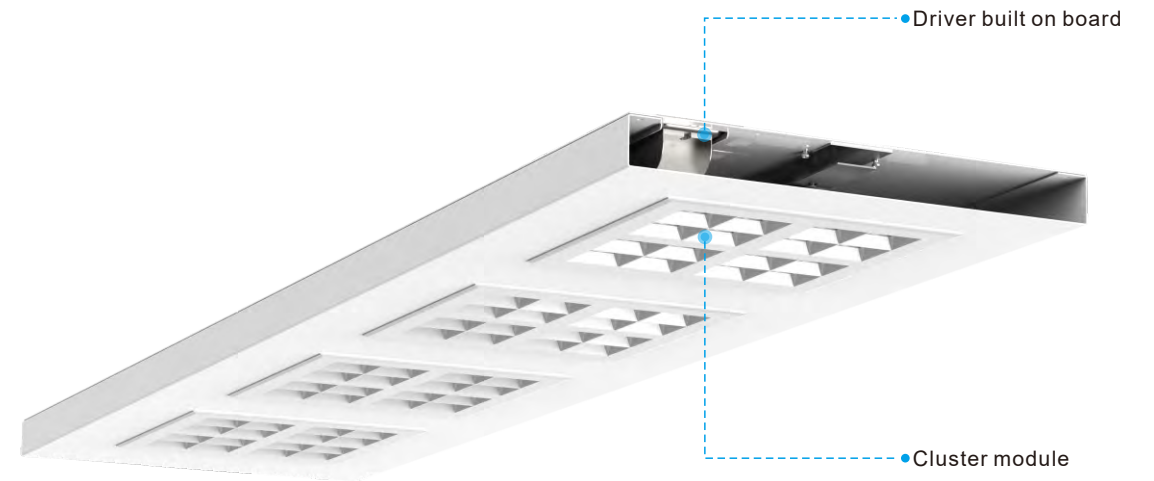

## Easy installation for different ceiling

Owing to the standard-complaint dimension and lumen package, Louva Evo could be installed in variety of ceilings in a few simple steps and perfectly suit for lighting refurbishment projects.

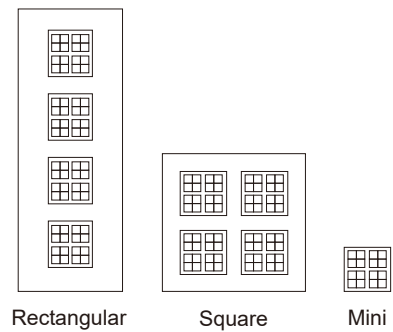

Rectangular


Square

Mini

## Fast maintenance

Thanks to the modular design, both the cluster module and driver can be easily assembled and disassembled for maintenance.


## Louva Evo Luminaire Details

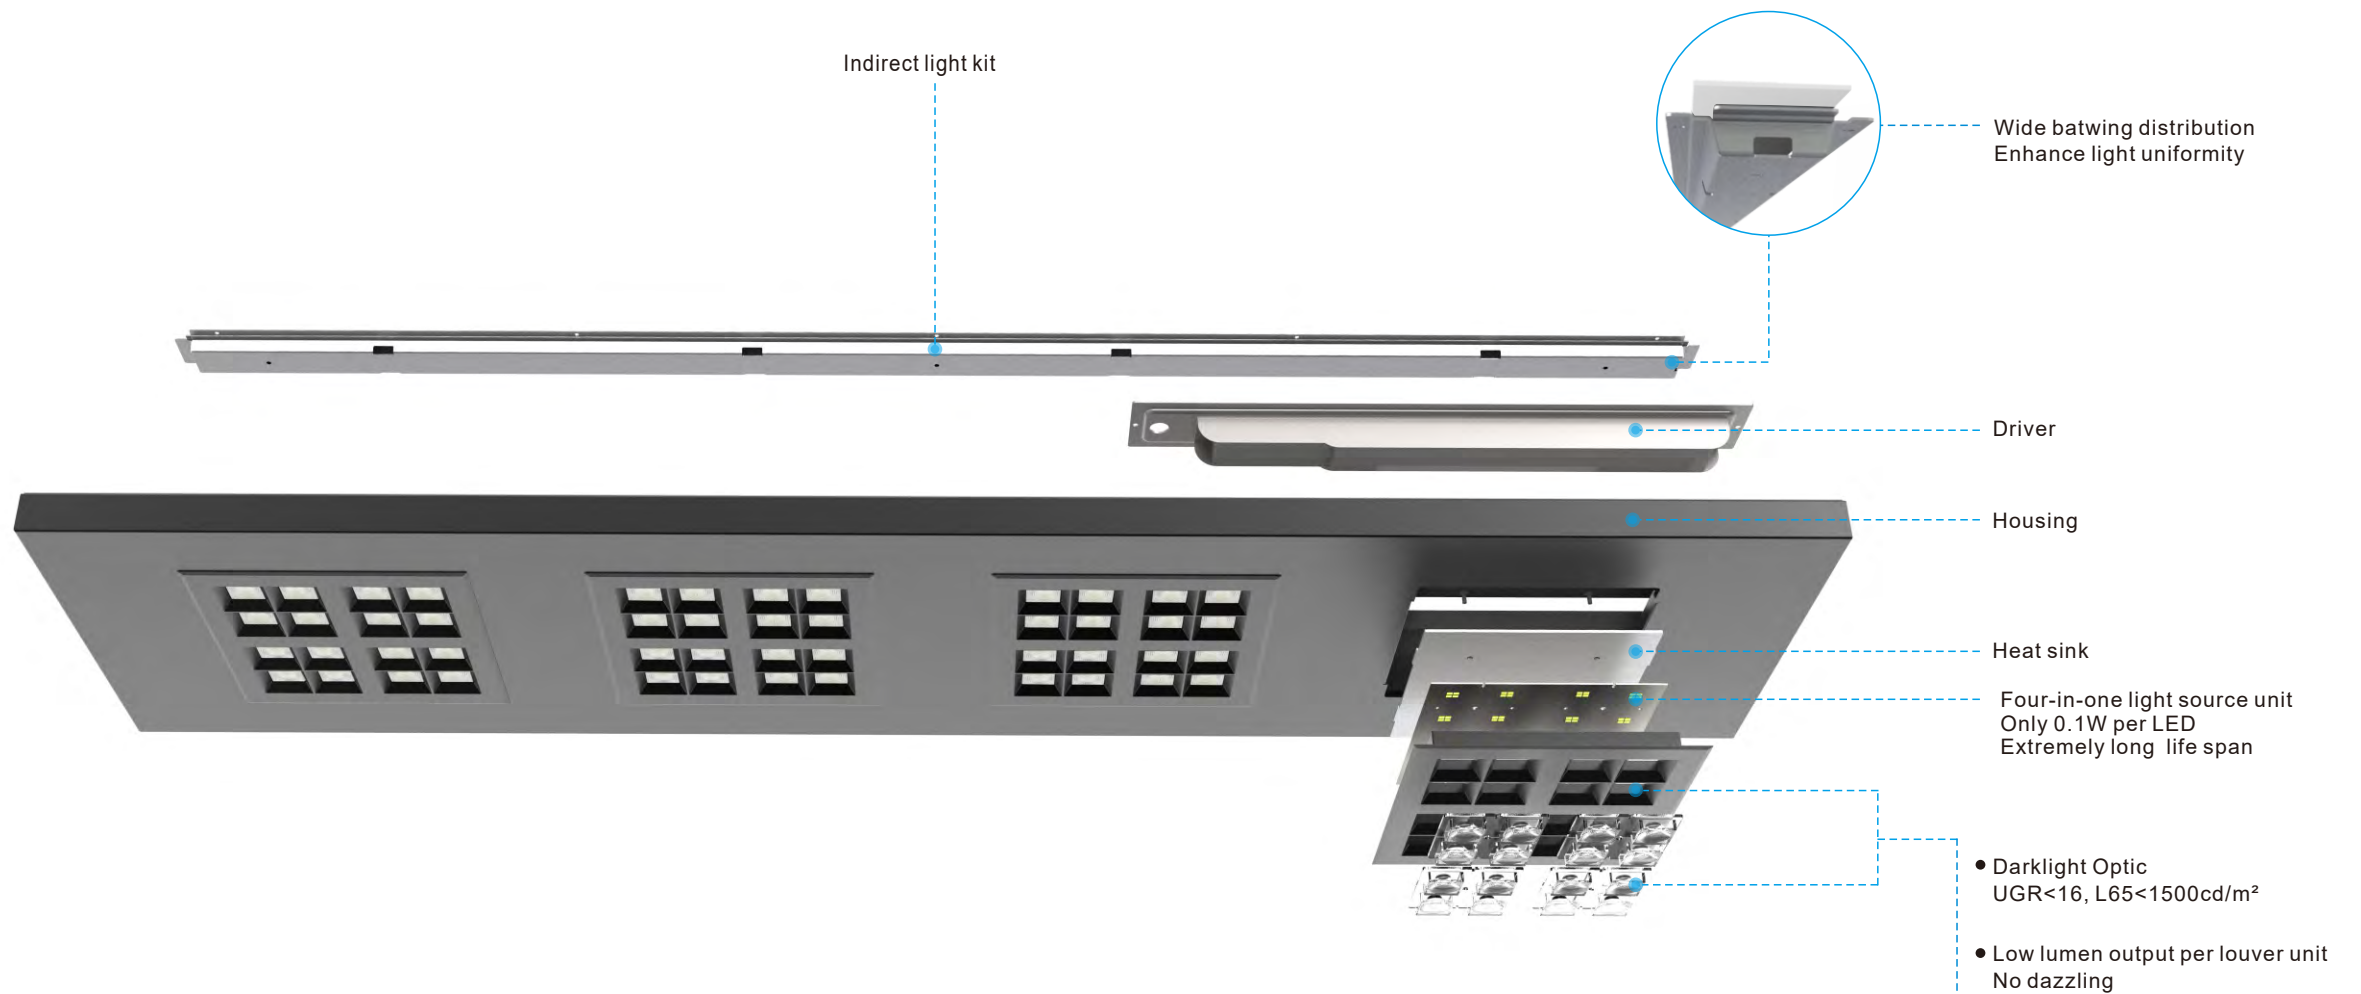


Modular design. Fast mounting. Easy maintenance

# LP-nouva Q Order Option

## Shapes



Square

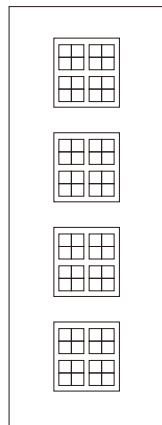

Rectangular




Mini


## Mounting



Lay-in



Pendant



Surface-mounted

## Control



ON/OFF



DALI




Sensor




Emergency


## Optics




Standard beam



Wide beam



Standard beam  
Indirect/direct




Wide beam  
Indirect/direct

## CCT



3000K




4000K




3000K-6500K


## Lumen



3200lm  
(Direct)




4000lm  
(Direct)



4800lm  
(Indirect /direct)

## Color & Finish




White  
(RAL9016)



Black  
(RAL9005)

### LP-nouva Q square luminaire

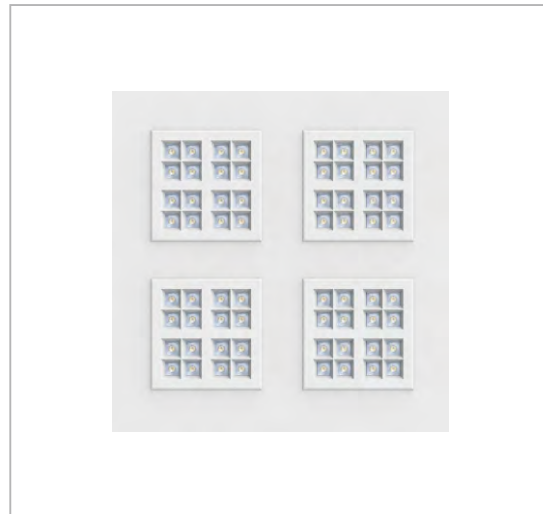


#### Features

- UGR<16, glare-free and uniform light.
- Elegant and modular design.
- Easy installation and replacement.
- Up to 140lm/W.
- Versatile for variety of mountings.
- No flickering, visual comfort.

#### Application

- Office, education, communication area.

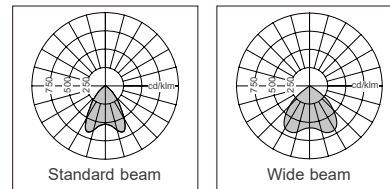

#### Specifications


##### General

- Size 595x595mm, 620x620mm
- Color Matt White(RAL9016), Matt Black(RAL9005)
- Material Housing: Steel  
Lens: PMMA  
Louver reflector: PC

##### Electrical

- Efficacy Up to 140lm/W
- Wattage 26W, 29W
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

##### Dimensions

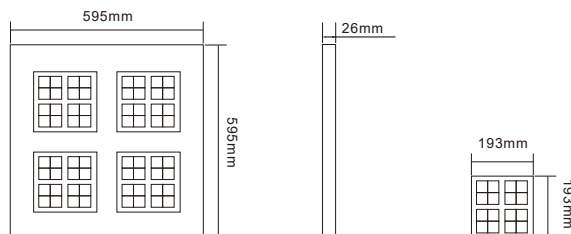

##### Optical

- Lumen 3200lm, 4000lm
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >80Ra, >90Ra
- UGR C0<16,C90<16 (X=4H,Y=8H)@65°  
C0<19,C90<19 (X=4H,Y=8H)@95°
- SDCM ≤3

##### Durability

- Lifespan 50000H(L90, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C
- IP Protection IP40
- IK Protection IK05

### LP-nouva Q rectangular luminaire




#### Features

- UGR<16, glare-free and uniform light.
- Elegant and modular design.
- Easy installation and replacement.
- Up to 140lm/W.
- Versatile for variety of mountings.
- No flickering, visual comfort.

#### Application

- Office, education, communication area.

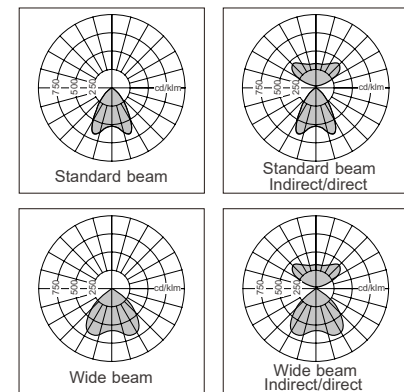

#### Specifications


##### General

- Size 295x1195mm
- Color Matt White(RAL9016), Matt Black(RAL9005)
- Material Housing: Steel  
Lens: PMMA  
Louver reflector: PC

##### Electrical

- Efficacy Up to 140lm/W
- Wattage 26W, 29W, 33W
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

##### Dimensions

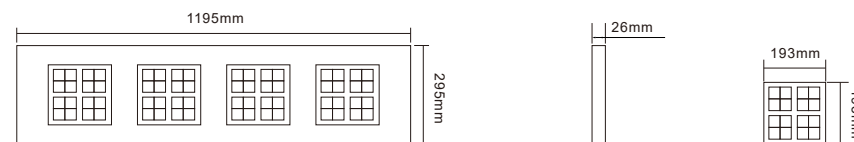

##### Optical

- Lumen 3200lm,4000lm,4800lm(1600lm↑+3200lm↓)
- CCT 3000K, 4000K,3000K-6500K tunable
- CRI >80Ra, >90Ra
- UGR C0<16,C90<16 (X=4H,Y=8H)@65°  
C0<19,C90<19 (X=4H,Y=8H)@95°
- SDCM ≤3

##### Durability


- Lifespan 50000H(L90, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C
- IP Protection IP40
- IK Protection IK05

### Mini module

Act as square downlight



Act as customized luminaire configurater

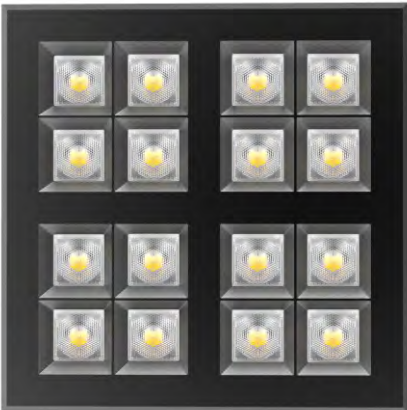

### LP-nouva Q downlight




#### Features

- UGR<19, glare-free and uniform light.
- Elegant and modular design.
- Easy installation and replacement.
- Up to 135lm/W.
- No flickering, visual comfort.

#### Application

- Office, education, communication area.

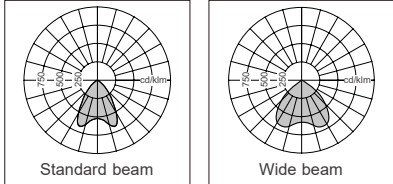

#### Specifications


##### General

- Size 193x193mm
- Color Matt White(RAL9016), Matt Black(RAL9005)
- Material Housing: Steel  
Lens: PMMA  
Louver reflector: PC

##### Electrical

- Efficacy Up to 135lm/W
- Wattage 12W,15W
- Voltage 200-240V
- Frequency 50/60Hz
- THD <15%

##### Dimensions

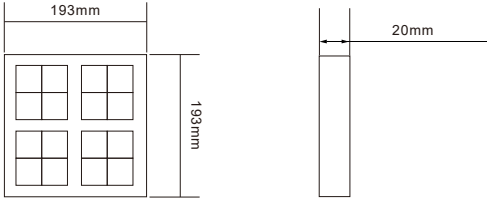

##### Optical

- Lumen 1500lm,2000lm
- CCT 3000K, 4000K, 3000K-6500K tunable
- CRI >80Ra, >90Ra
- UGR C0<19,C90<19 (X=4H,Y=8H)@65°  
C0<22,C90<22 (X=4H,Y=8H)@95°
- SDCM ≤3

##### Durability

- Lifespan 50000H(L90, Tc=55°C)
- Warranty 5 years
- Operating -35~45°C



# LP-nouva Q

Glare-free and versatile  
luminaire for various mountings

Liht-Project - AT

6020 Innsbruck

Maria Theresienstraße 7/1m

[www.light-project.at](http://www.light-project.at)

Lihtproject-italia.it

I-20123 Milano

Via Cesare de Sesto 24

[www.lightproject-italia.it](http://www.lightproject-italia.it)

